


# Chassis mounted filter

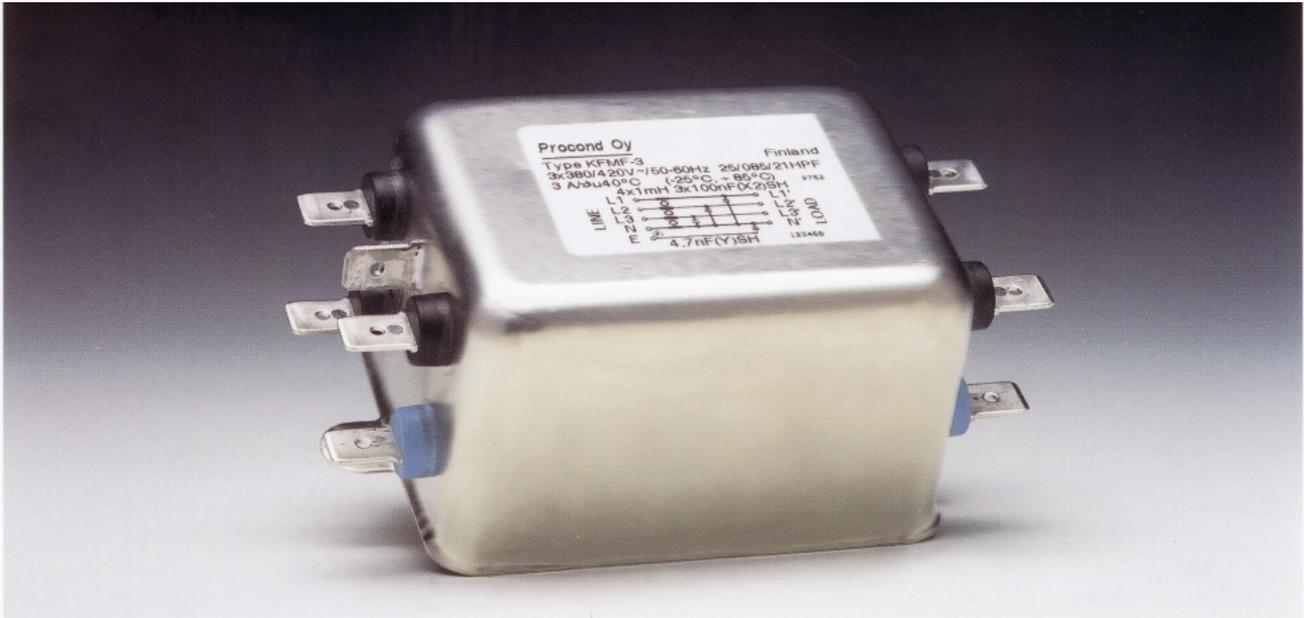

## KFMF

### General purpose 3 –phase chassis mounted filter for industrial applications

General purpose 3-phase filter with good protection against common and differential mode interference. C-type filters with 22000 pF Y-capacitors.

Applications: 3-phase systems and installations


- 3 – 10 A current ratings

Operating voltage: 420 VAC  
Operating frequency: 0 – 400 Hz  
Temperature range: -25°C - +85°C


Type	Rated current [A] (40°C)	Max. Leakage current [mA] (250 V, 50 Hz)	L [mH]	Cx [μF]	Cy [pF]	Weight [g]
KFMF-3	3	0,5	4 x 1	0,1	4700	240
KFMF-3C	3	2,1	4 x 1	0,1	22000	240
KFMF-6	6	0,5	4 x 0,45	0,1	4700	240
KFMF-6C	6	2,1	4 x 0,45	0,1	22000	240
KFMF-10	10	0,5	4 x 0,2	0,1	4700	240
KFMF-10C	10	2,1	4 x 0,2	0,1	22000	240

Connectors: Faston 6,3 x 0,8mm


### KFM-3

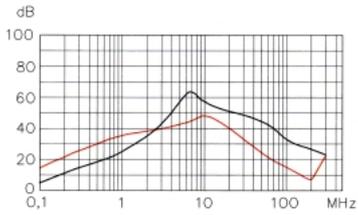


### KFM-6

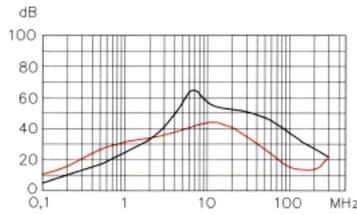


### KFM-10

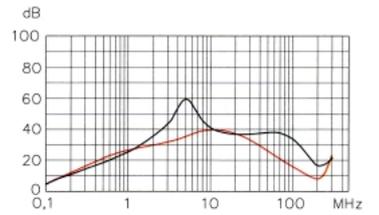


### KFM-3C

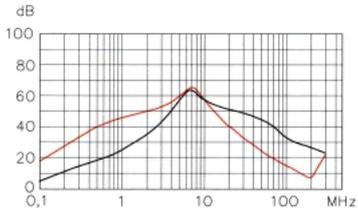




### KFM-6C

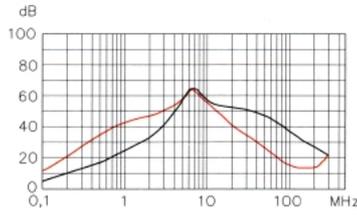

### KFM-10C

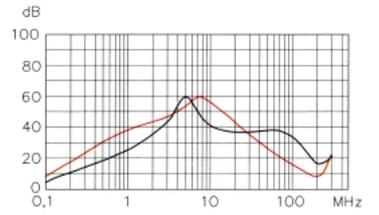

- asym.,
- symm.

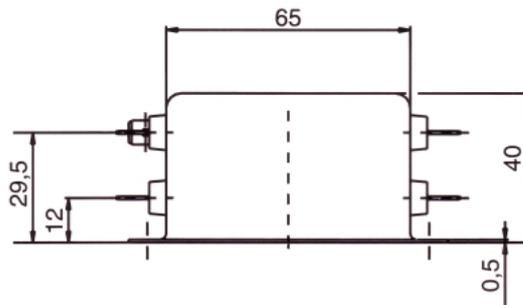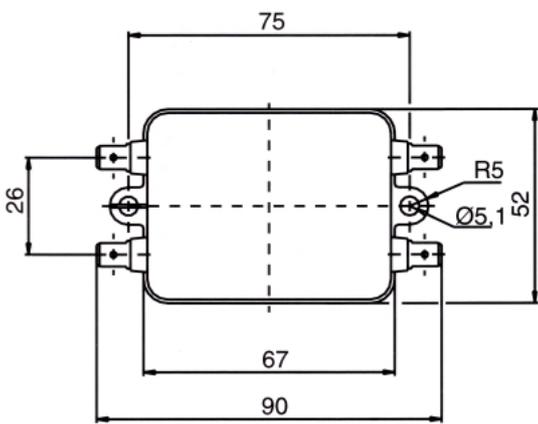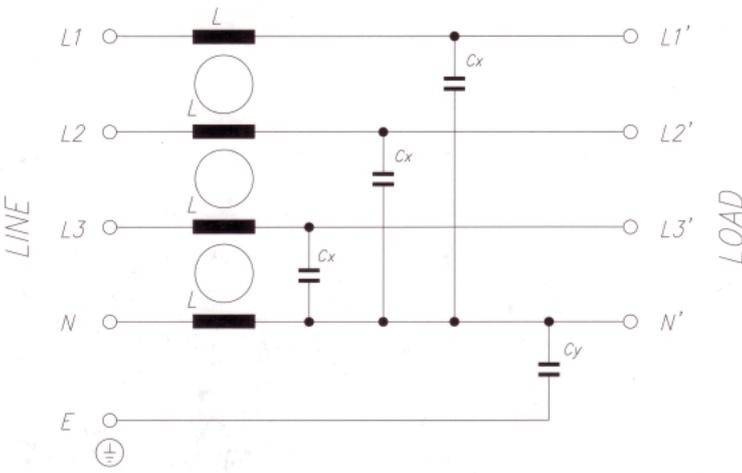

**PROCOND OY**  
 Veikkointie 9  
 FI-03100 Nummela  
 Finland

www.procond.fi  
 sales@procond.fi  
 Tel. +358 (0)10 424 8900  
 Fax. +358 (0)10 424 8901